


## Notice boards

# FN 0

### The classic sliding door notice board

Your notices are optimally placed behind the glass of the FN/FR sliding door notice board. Constructed of narrow yet torsion-resistant aluminium profile.

| Article number | EAN           | Width   | Height | Depth |
|----------------|---------------|---------|--------|-------|
| 103200043      | 4250366503691 | 1268 mm | 920 mm | 30 mm |

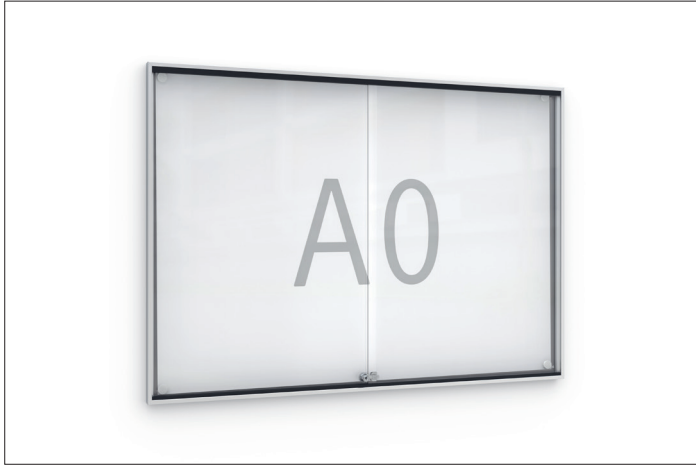

|                         |                         |
|-------------------------|-------------------------|
| Visible surface width   | 1247 mm                 |
| Visible surface height  | 880 mm                  |
| Usable interior depth   | 10 mm                   |
| Location                | Indoors                 |
| Number of DIN-A4-Sheets | 16                      |
| Number of locks         | 1                       |
| Colour                  | Silver                  |
| Mounting type           | Wall- or stand mounting |
| Opening type            | Sliding doors           |
| Configuration           | One-sided               |



With our FN/FR model, you receive a classic sliding-door wall-mounted display case conceived for DIN formats A3 to A0. Its tempered safety glass doors offer maximum visibility. The approved B1 fire-protected notice board guides its doors on a black plastic rail while a glass slide lock protects against unauthorised access. The entire structure made of torsion-resistant aluminium profiles has a maximum depth of 30 mm and is ideal for indoor

installation in tight spaces. With its sliding door concept, changing notices in, for instance, corners or niches is not a problem. The FN/FR model is one of our classics and is delivered to you within 72 hours. The notice board with tempered safety glass is also available with round die-cast zinc corner joints – for even more safety.

- + All-glass doors including slide lock
- + Minimal depth (30 mm)
- + The model is also available with round corner joints
- + Building material class B1 (low flammability) according to DIN 4102-1
- + Speedy delivery within 72 hours