


Guaranteed your bike is still standing when you return

Corrosion-protected leaning parker with functional bracket, impact protection through plastic sheathing and fastening options for lock systems.

Article number	EAN	Width	Height	Depth
105700193	4250366534947	1000 mm	856 mm	795 mm





Parking spaces	2
Colour	Silver
Knee-high crossbar	No
Construction type	Screwed / assembly kit
Base material	Steel
Mounting type	Floor mounting
Bike spacing	500 mm
Configuration	One-sided
Positioning space depth	1850 mm



The Parker with Frame Rest 0500 XBF for ground mounting outdoors features a robust round tubing steel construction, retaining its value and protected against corrosion through galvanisation. Thanks to its functional support brackets and plastic-coated impact protection in signal red, it offers perfect protection against falling over or wilful pushing over for high-quality bicycles. The space between bicycles is 500 mm, two-sided 540 mm. The

0500 XBF has integrated round steel eyelets for lock fastening for optimised theft protection and can be extended as required through row connection. The 0500 XBF is shipped in recyclable packaging including bolts, ground mounting brackets in a set of 2 and assembly instructions. Meets the requirements for theft protection according to DIN 79008:2016-05 point 7.2.

- + Robust, corrosion protected steel construction
- + Impact protection via plastic sheathing in signal red
- + Integrated round steel eyelets for theft protection
- + Prefabricated for row connection
- + Floor mounting bracket in set of 2

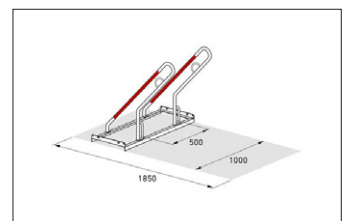

Further information on our products and contact options at: www.wsm.eu/en.
No guarantee can be given for the completeness and correctness of the data and illustrations.