Bicycle racks

1160

Stable, well-shaped simplicity
Corrosion-protected steel construction with robust tubular hoops, three to ten parking spaces and space-saving height-offset. No assembly required.

Article number	EAN	Width	Height	Depth
105700008	4250366513430	1750 mm	405 mm	687 mm

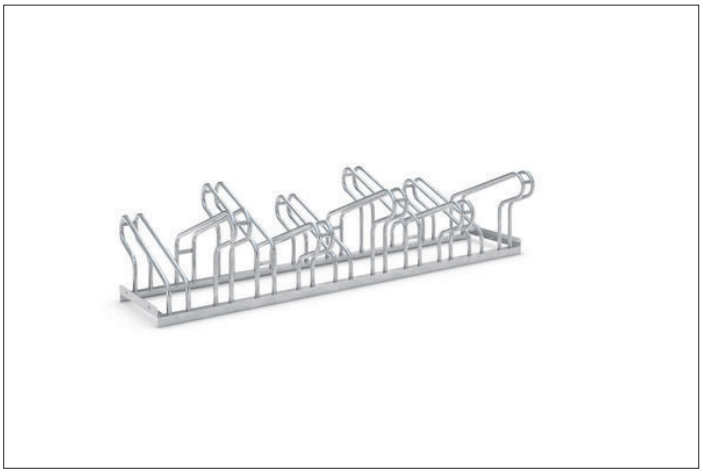

Parking spaces	10
Colour	Silver
Weight	19,80 kg
Construction type	Welded / ready assembled
Base material	Steel
Mounting type	On the floor
Tyre width	55 mm
Configuration	Two-sided



In the Hoop Parker 1000 bicycles and pedelecs park offset in height at a comfortable spacing between wheels of 350 mm or also double-sided on request to save valuable space. The parking space depth is approx. 1850 mm for single-sided parking, approx. 3200 mm for double-sided. Fast set up, without requiring assembly or concreting, this model can create large and super-large bicycle parking facilities in front of schools, lecture theatres, stadiums, train stations, etc. – or in front of the pharmacy. Ground anchors and mounting brackets are sold separately.

- + **Robust, corrosion-protected steel construction**
- + **Alternate high/low setting**
- + **Optional for single or double-sided bike parking**
- + **Row/series connection (with an even amount of spaces) and ground mounting possible**
- + **No assembly required**





Further information on our products and contact options at: www.wsm.eu/en.
No guarantee can be given for the completeness and correctness of the data and illustrations.

WSM – Walter Solbach Metallbau GmbH
Industriestraße 20 · 51545 Waldbröl · www.wsm.eu