


Bicycle parking with the best recommendation

With its functional frame rests and steel eyelets, this free-standing bicycle leaning system also protects top-quality bicycles from damage and theft.

Article number	EAN	Width	Height	Depth
105700178	4250366528526	3240 mm	856 mm	1200 mm

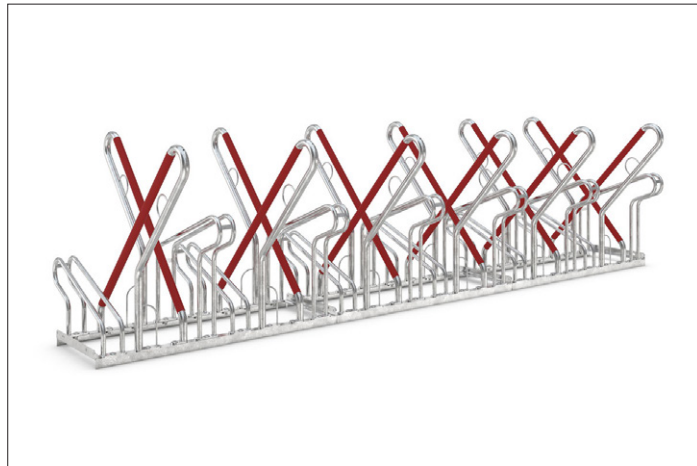



Parking spaces	12
Colour	Silver
Weight	82,30 kg
Construction type	Screwed / assembly kit
Base material	Steel
Mounting type	On the floor
Bike spacing	500 mm
Tyre width	55 mm
Configuration	Two-sided
Positioning space depth	3200 mm



The striking detail of this free-standing bicycle parking system is the diagonal frame rest sheathed in signal red plastic. It protects every bicycle or e-bike against wanton or accidental wheel twisting and consequential damage to the rims. Integrated steel eyelets provide optimal theft protection. The spacing between hoops is generously laid out and ideal for bicycles with up to 55 mm wide tyres. Spacing is 500 mm or 540 mm

for double-sided parking. The stanchion thus offers you or your employees, customers and guests the highest level of parking convenience. Optionally single or double-sided. Of course, the system is prefabricated for ground mounting and series connection. Ground mounting brackets included. Meets the requirements for theft protection according to DIN 79008:2016-05 point 7.2

- + Free-standing, bolted tubular steel construction
- + Ample plastic-sheathed frame rests
- + Integrated eyelets for preventing theft
- + Prefabricated for row/series connection

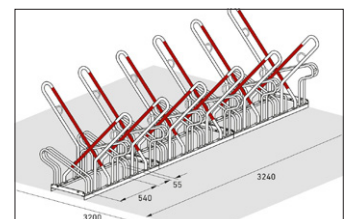

Further information on our products and contact options at: www.wsm.eu/en.
No guarantee can be given for the completeness and correctness of the data and illustrations.