
3990



Suspension parking system for space-optimised wall mounting

Wall-hanging system for the space-optimised storage of bicycles of all kinds and all tyre widths. Rim-friendly sheathing. Simple bolt-on dowel mounting.

| Article number | EAN | Width | Height | Depth |
|----------------|---------------|-------|--------|--------|
| 105700097 | 4250366514291 | | 600 mm | 400 mm |

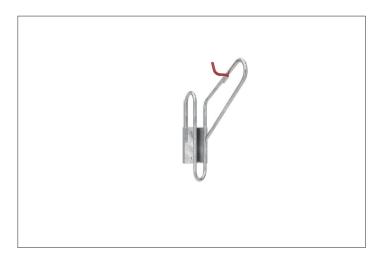

| Parking spaces | 1 | |
|-------------------------|------------------------|--|
| Colour | Silver | |
| Weight | 2,30 kg | |
| Construction type | Screwed / assembly kit | |
| Base material | Steel | |
| Mounting type | Wall mounting | |
| Tyre width | 64 mm | |
| Configuration | One-sided | |
| Positioning space depth | 1100 mm | |
| | | |











The Hanging Parker 3900 consists of a very robust construction of tubular steel with a solid large-surface mounting plate. Two differently shaped hoops fix the front wheel, which is suspended on a plastic-coated hook, thus protecting the sensitive rim from damage. The Hanging Parker 3900 is suitable for bicycles of all kinds and all tyre widths. In order to make better use of existing

space, there are three versions with different adjustment angles available. The recommended mounting spacing when using multiple parkers in series is 650 mm. The Hanging Parker 3900 is also available on request galvanised and RAL colour-coated according to your choice.

- Very stable tubular steel construction
- + Robust, plastic-coated suspension hooks
- + Suitable for all bikes and tyre widths
- + Minimal space requirement
- + Recommended hook height approx. 2000 mm





Further information on our products and contact options at: www.wsm.eu/en.

No guarantee can be given for the completeness and correctness of the data and illustrations.